




PORCH LINTELS

TDS-005 Dec 2017

All units are supplied with cast-in threaded sockets designed to take lifting loops.

Units should be lifted using either a spreader beam or two legged brothers of sufficient length to provide a 30° angle. A slip plane is required at the stone bearing ends. The support lintel over the stone should bear outside the stone and a soft joint provided to prevent any deflection imposing a load onto the stone.

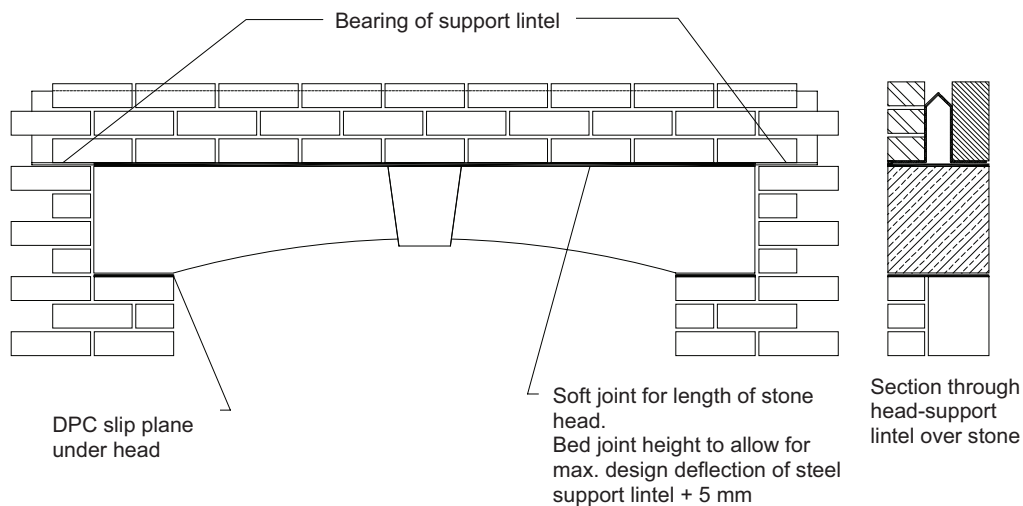

PORCH LINTEL—FRONT ELEVATION